


We Image Your Needs.



Nephro Cam™

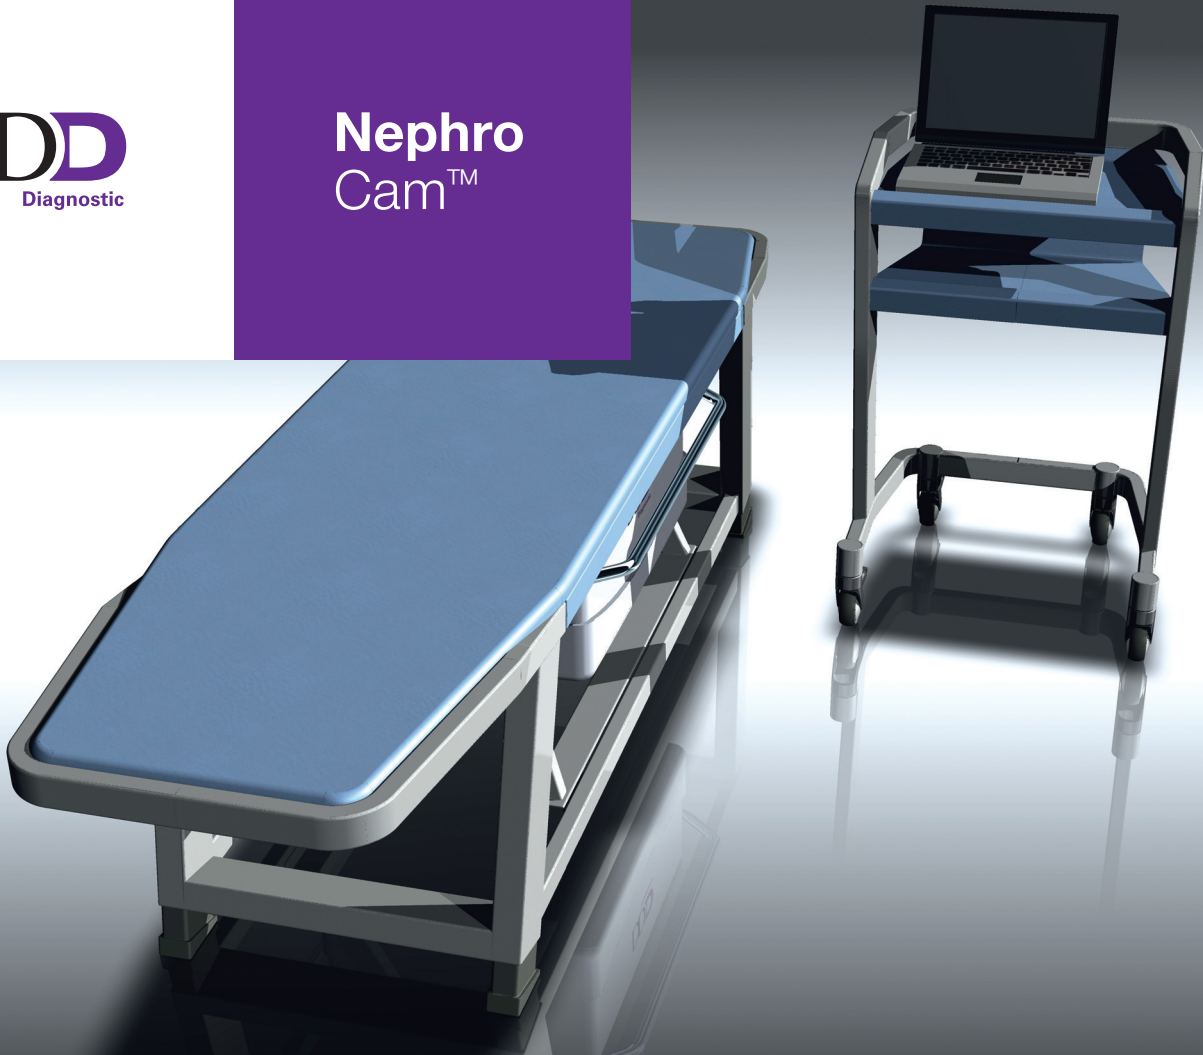

Gamma camera system
for Radioisotope Renography.



Nephro Cam™



The most cost-effective solution available on the market today...

Quick and seamless imaging of the kidneys.

Optimized for 99mTc-DTPA
and 99mTc-labelled MAG3
radiopharmaceuticals.

Improved workflow with a minimum
of operator interactions.

Excellent performance and reliability.

Room size requirement
as small as 2.5×4.0 meters.

Patient-friendly and comfortable.

Also ideal for pediatrics, i.e. no overwhelming
and claustrophobic gantry.


Connects to existing nuclear medicine
workstations.

Integrates with hospital infrastructure –
DICOM Modality Work-list

NephroCam™ is optimized for seamless
radioisotope renography.

The camera is designed as a workhorse
camera in a busy nuclear medicine
department.

Thus **NephroCam™** workflow requires only
a minimum of operator interactions.




**Handgrip
and brakes
for safe
and easy
detector
positioning.**

The large field of view detector will image
almost all patients without having to be
positioned. In cases where detector positioning
is needed, a manual solution is provided
on the detector to slide it to the correct
position.

NephroCam™ comes with DDD's new
.NET-based ClearSight™ acquisition software
packages.

Like **NephroCam™**, ClearSight™ has been
designed with simplicity and user friendliness
in mind.



Main Specifications

NephroCam™
Type No. 9KID2275

Detector	
UFOV	52×37 cm
Energy range	55–200 keV
Intrinsic spatial resolution (UFOV)	<3.8 mm (FWHM), <7.6 mm (FWTM)
Intrinsic spatial linearity (UFOV)	<0.2 mm (Differential), <0.5 mm (Absolute)
Intrinsic energy resolution (UFOV)	<9.4 %
Intrinsic flood field uniformity (UFOV)	<2.5 % (Differential), <3.5 % (Integral)
Intrinsic count rate performance wo. scatter	320 kcps
System spatial resolution wo. scatter	
LEGP (140 keV)	<9.1 mm FWHM @ 100 mm
LEHR (140 keV)	<7.9 mm FWHM @ 100 mm
System planar sensitivity	
LEGP (140 keV)	~ 250 cpm μ Ci +/- 7 %
LEHR (140 keV)	~ 170 cpm μ Ci +/- 7 %
Collimators	LEGP or LEHR
Image acquisition	
Supported imaging procedures	Dynamic and Static.
Pixel size	8.9 mm square (64 matrix). 1–5 zoom
Matrix size	64 × 64, 128 × 128, 256 × 256, 512 × 512 pixels
User-definable acquisition protocols	Factory pre-defined with all parameters set. Manual definition of user-specific protocols.
Termination	
Dynamic	Up to 3 phases. Up to 2000 frames 0.02–999 s/frame
Static	Time and/or counts
DICOM	DICOM 3.0. Manual “push” and automatic “push” protocol to user-provided nuclear medicine workstation. DICOM Modality Work-list as an option
General	
Dimensions	(W) 60 cm × (L) 220 cm × (H) 66–75 cm configurable upon installation
Weight	600 kg
Power requirements	90–260 VAC 50/60 Hz
Total heat dissipation	200 BTU

[DATA SUBJECT TO CHANGE]



**NephroCam™ is designed,
developed and manufactured
by DDD-Diagnostic A/S in Denmark.**

DDD is a well known OEM manufacturer of gamma camera systems. Early 2012 the first products under own brand were also released to the market.

DDD was founded in 1987 and has been involved in design and development of some of the most successful gamma camera systems in cooperation with major international vendors of medical diagnostic imaging equipment.

DDD-Diagnostic A/S

Dr. Neergaards Vej 5E
DK-2970 Hørsholm
Denmark

www.ddd-diagnostic.dk